


# LOOSE FLANGE PP STEEL ANSI 150



PP glass fiber reinforced with steel inlay

PP-Stahl

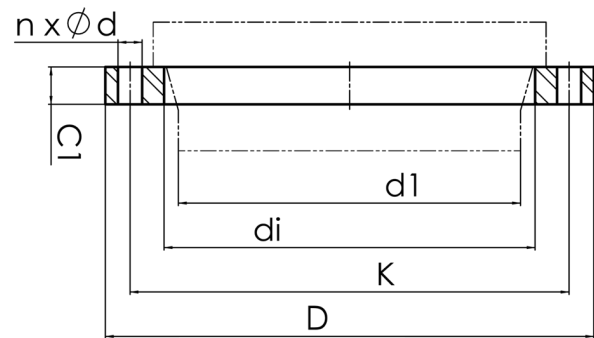

## SDR

| Art. No.      | DN<br>[mm] | d1<br>[mm] | di<br>[mm] | D<br>[mm] | K<br>[mm] | n  | Ød<br>[mm] | C1<br>[mm] | PFA<br>[bar] | kg    |
|---------------|------------|------------|------------|-----------|-----------|----|------------|------------|--------------|-------|
| 13105401-ANSI | 16"        | 400        | 429        | 597       | 540       | 16 | 29         | 44         | 10           | 17,60 |

PFA = maximum allowable operating pressure (20°)

Note: Use washers when screwing

For questions, please feel free to contact us at: Tel. + 49 281 98 414

- 0