


# PROFIED LOOSE FLANGE;



GGG with PP encapsulated  
highly corrosion resistant  
drilled according to DIN EN 1092-1 PN 16

PP-Stahl

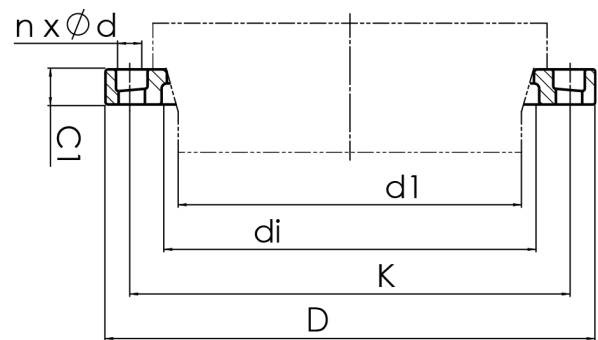

| Art. No.    | DN<br>[mm] | d1<br>[mm] | di<br>[mm] | D<br>[mm] | K<br>[mm] | n  | Ød<br>[mm] | M  | C1<br>[mm] | PFA<br>[bar] | kg    |
|-------------|------------|------------|------------|-----------|-----------|----|------------|----|------------|--------------|-------|
| 13107402-PP | 400        | 400        | 430        | 600       | 525       | 16 | 30         | 27 | 56         | 16           | 12,32 |

galvanized on request

Note: Use washers when screwing

For questions, please feel free to contact us at: Tel. + 49 281 98  
414 - 0