


drilled according to DIN EN 1092-1 PN 16  
material S355JR

Stahl verzinkt

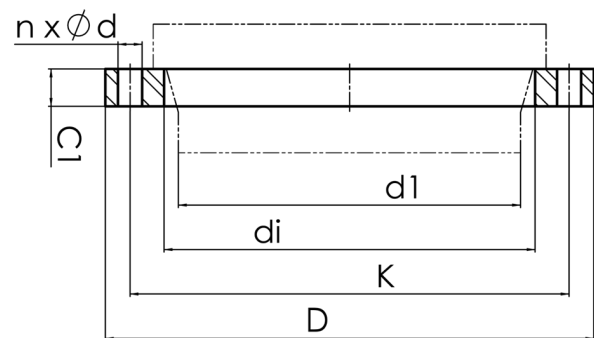

| Art. No.     | DN<br>[mm] | d1<br>[mm] | di<br>[mm] | D<br>[mm] | K<br>[mm] | n  | Ød<br>[mm] | C1<br>[mm] | PFA<br>[bar] | kg     |
|--------------|------------|------------|------------|-----------|-----------|----|------------|------------|--------------|--------|
| 13109962-SVZ | 1800       | 1800       | 1875       | 2130      | 2020      | 44 | 56         | 105        | 16           | 567,20 |

other dimensions and pressure classes on request  
PFA = maximum allowable operating pressure (20°)

For questions, please feel free to contact us at: Tel. + 49 281 98  
414 - 0