


male thread  
do not use thread sealing pastes that are harmful to PE  
install with low mechanical stress and avoid large cyclic temperature changes

PP

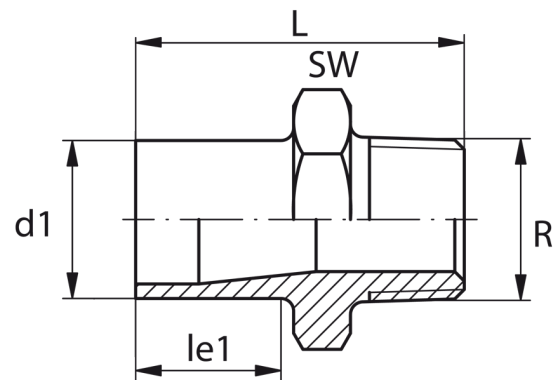

## SDR 11

| Art. No. | d1<br>[mm] | Rp<br>[mm] | le1<br>[mm] | L<br>[mm] | SW<br>[mm] | kg   |
|----------|------------|------------|-------------|-----------|------------|------|
| 23302342 | 25         | 3/4"       | 23          | 52        | 36         | 0,03 |

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0